



Procedure Light

AIM LED

Philips Burton combined the smart and versatile design of its existing AIM lights with the efficiency and longevity of an LED light source.


The Right Light

PHILIPS
burton

AIM LED


The latest advances in state-of-the-art lighting technology to achieve incredible performance and unsurpassed value and energy efficiency.

Burton's AIM LED – the most exciting revolution in examination and procedure lighting. The AIM LED uses the latest advances in state-of-the-art lighting technology to achieve incredible performance and unsurpassed value and energy efficiency. The AIM LED provides 10% more illumination (45,000 lux / 4181 fc at 1 meter) than even the high performing AIM-50®. A 92 CRI rating produces very accurate color visibility, which is important for an accurate diagnosis. With 10 times greater (20,000 hours) lamp life than traditional light source products, you will save more than \$1000 in bulb replacements alone. Additionally, the AIM LED uses 70% less energy.

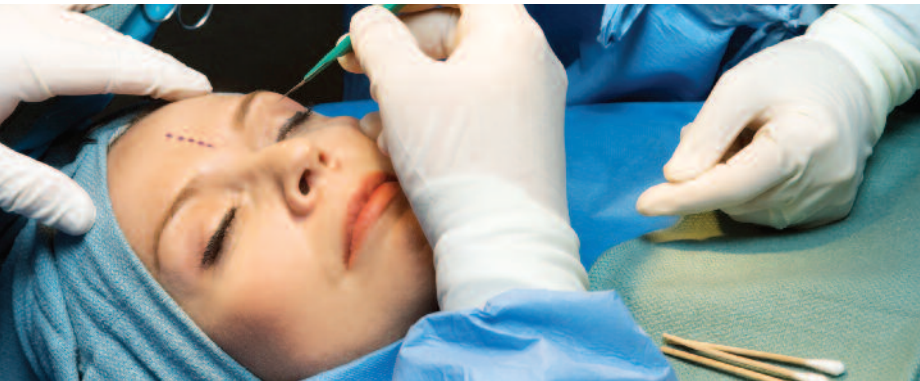

Features

- 45,000 lux (4181 fc) at 1 meter
- 4300 K color temperature
- CRI (Color Rendering Index) of 92
- 3 LED modules with a 20,000-hour life
- Adjustable focus using center handle
- UL60601-1 / IEC 60601-1 / IEC 60601-1-2 / IEC 60601-2-41; CAN/CSA C22.2 601-1 M90 certified
- CE marked
- 5-year limited warranty
- Assembled in USA

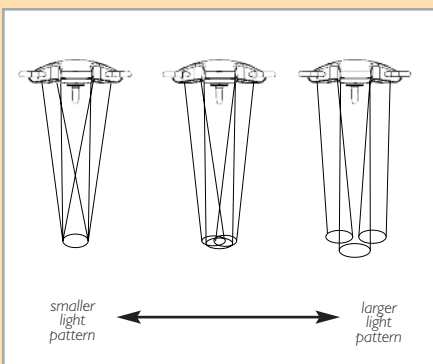


Larger and Adjustable Light Pattern

The multiple reflectors of the AIM LED can be tilted by rotating the sterilizable light handle to adjust the size and pattern of the light to the working area.



Light Pattern Free of Cast Shadows

The AIM LED has a unique Y-Shaped design, which facilitates placement of the lighthead around the physician's head minimizing the obstruction of light into the surgical field.

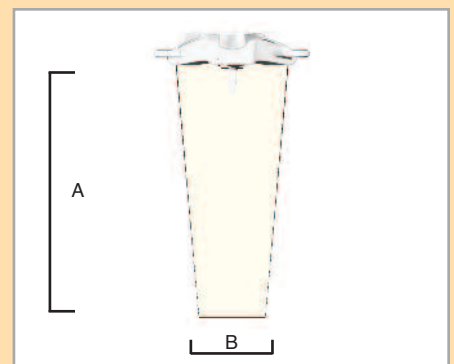


Depth of Field / Beam Diameter

| | | cm | in |
|---|-------------------|-----|----|
| A | Depth of Field | 137 | 54 |
| B | Beam Diameter D10 | 33 | 13 |



Efficient LED Light Source

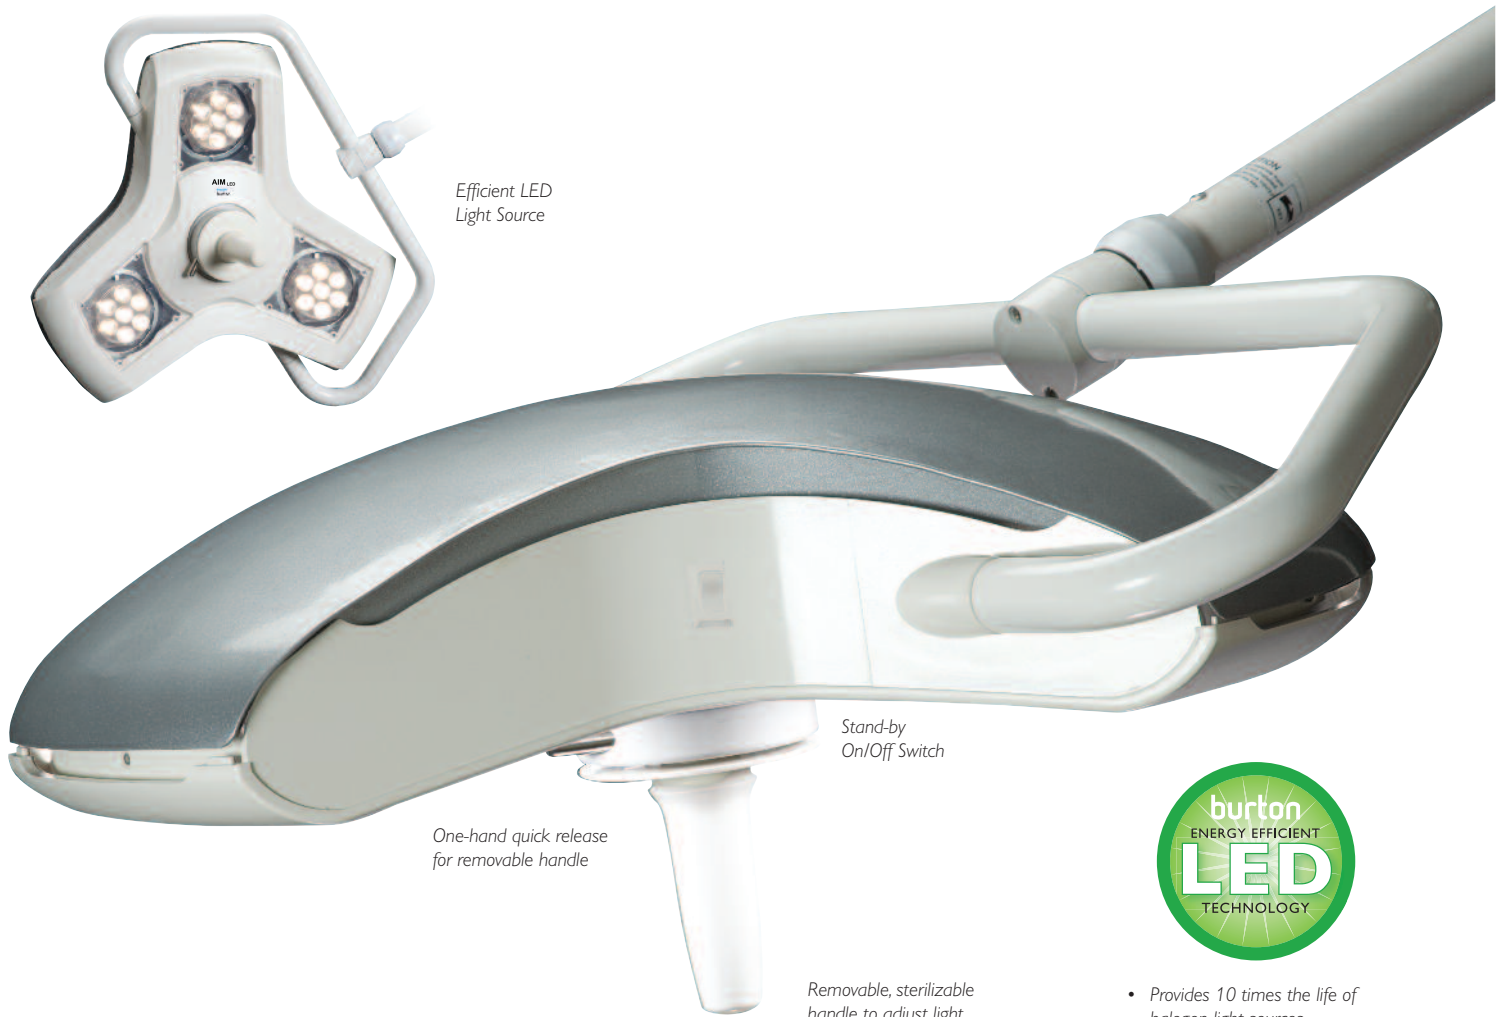





Stand-by On/Off Switch

One-hand quick release for removable handle



Removable, sterilizable handle to adjust light pattern

- Provides 10 times the life of halogen light sources
- Uses half the power of halogen light sources





Ordering Information

| 120V Model | 230/240V Model | 230/240V SP Model* | 100V Model | Description |
|-------------|----------------|--------------------|------------|------------------------------------|
| ALEDFL | ALEDFL03 | ALEDFL25 | ALEDFL01 | Floorstand |
| ALEDSC | ALEDSC03 | ALEDSC25 | ALEDSC01 | Single Ceiling Mount |
| ALEDDC | ALEDDC03 | ALEDDC25 | ALEDDC01 | Double Ceiling Mount |
| ALEDW | ALEDW03 | ALEDW25 | ALEDW01 | Wall Mount |
| Accessories | | | | |
| 1017040 | | | | Sterilizable / Autoclavable Handle |
| 0008100PK | | | | Disposable Handle Covers, 25/Box |

*SP Model refers to Spanish Language Manuals.

AIM_{LED} range of motion

The AIM_{LED}'s 360° limitless arm-and-mounting-system-rotation around vertical axes on single ceiling models is a key feature previously available only on more expensive OR lights. The arm system also provides a maximum reach of 63" (160 cm) and diameter of 10' (305 cm), allowing it to illuminate the patient from head to toe with no drift.

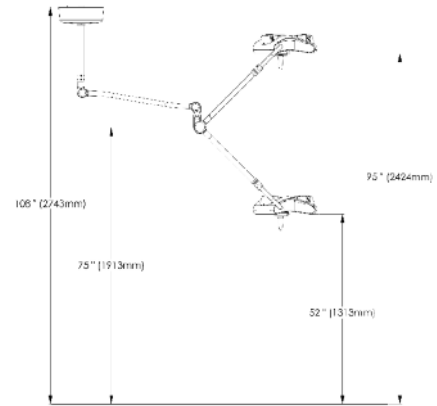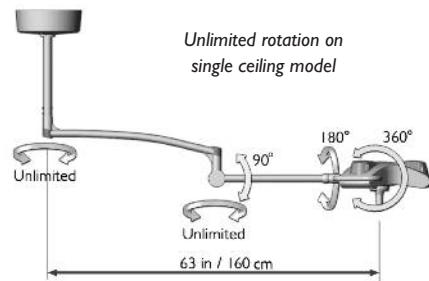

Summary of technical data

| | |
|--|--|
| Illuminance: | 45,000 lux (4181 fc) at 1 meter |
| Color temperature: | 4300 K |
| CRI (Color Rendering Index): | 92 |
| Diameter of lighthouse: | 20" (51 cm) |
| Light field diameter: | 13" - 15" (33 cm - 38 cm) |
| Depth of illumination: | 54" (137 cm) |
| Focusing: | Adjustable using center handle |
| Number of LED modules: | 3 |
| Light sources: | Light Emitting Diodes (LED) |
| Rated life of LED lamp: | 20,000 hours |
| Swivel radius of lamp housing - ceiling mounted: | 63" (160 cm) max. |
| Height movement of lamp housing - ceiling mounted: | 41" (104 cm) vertical movement |
| Minimum ceiling height/maximum ceiling height: | 8 ft./12 ft. (244 cm/366 cm) |
| Power: | 84 Watts |
| Mounting options: | Single ceiling, double ceiling |
| Total weight: | Floor version 43 lbs. (19.5 kg), single ceiling version 44 lbs. (19.9 kg) |
| Seismic calculations available: | Yes |
| Certifications/approvals: | UL60601-1 / IEC 60601-1 / IEC 60601-1-2 / IEC 60601-2-41 CAN/CSA C22.2 601-1 M90 CE marked |
| Product warranty: | 5-year parts and labor |
| Origin: | Assembled in USA |

Note: The optical data are nominal values based on measurements calculated according to UL/IEC performance standards at 120V



Philips Burton
21100 Lassen Street Chatsworth, CA 91311
Phone: 818-701-8700 Fax: 818-701-8725
www.burtonmedical.com

© 2011 Philips Burton. All rights reserved. Product designs protected by copyright.
We reserve the right to change details of design, materials and finishes.

LIT-0048, Rev. 3